

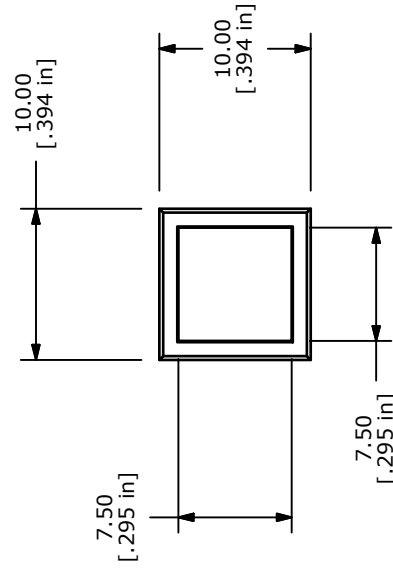




- NOTES:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT RATING: CURRENT: 100mA  
VOLTAGE: 30 VDC
  - OPERATING LIFE: 50,000 MAKE-AND-BREAK CYCLES
  - INSULATION RESISTANCE: 500VDC, 100 Mega-OHM, MIN.
  - OPERATING FORCE: 250 ± 100 GRAMS
  - OPERATING TEMP.: -20°C to 70°C
  - TRAVEL: MOMENTARY  
1.50 ± 0.3mm FULL TRAVEL
  - CONTACT RESISTANCE: 50 Milli-OHM, MAX.
  - ▲ DENOTES CRITICAL PARAMETER.
  - 2002/95/EC (ROHS) COMPLIANT
  - LED: NONE

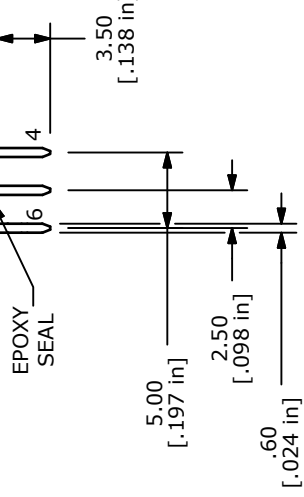

▲ TRANSPARENT ACTUATOR

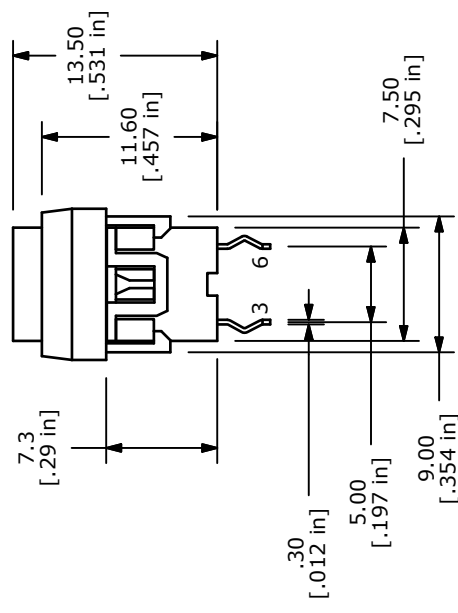

E-SWITCH™

TITLE LP40A1PBATN

B	19603	DRAWING UPDATE	1/19/11	BGL
A	18993	Release For Production	4/19/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2 = 1 DATE 4/19/2010 DR BLR DWG B240035

REV B