

Panel mounting frames - VS-PPC-F1-RJ45-MNNA-1C-FJJ - 1405332


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



RJ45 panel mounting frame, IP67, for push-pull interlocking, metal, with the Freenet system, for round panel cutout, with the RJ45 socket/socket socket insert, with seal, without mounting screws



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 420433
GTIN	4046356420433

Technical data

Mechanical characteristics

Number of positions	8
Number of slots	2
Locking type	Push Pull
Insertion/withdrawal cycles	>= 100
Color	silver
Degree of protection	IP65/IP67
Design	RJ45, IP65/67, version 14

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

Material data

Housing material	Zinc die-cast
Housing surface material	Nickel-plated
Material	Metal
Sealing material	NBR

Electrical characteristics

Number of positions	8
---------------------	---

Panel mounting frames - VS-PPC-F1-RJ45-MNNA-1C-FJJ - 1405332

Technical data

Electrical characteristics


Transmission characteristics (category)	CAT5 (IEC 11801:2002)
Degree of pollution	2

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Drilling diagram




Panel cutout

Dimensional drawing

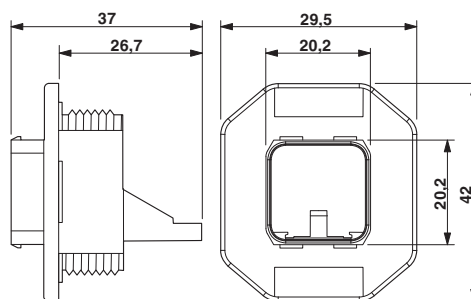


Push-Pull panel mounting frame, Freenet system, IP67

Dimensional drawing




Panel cutout

Dimensional drawing

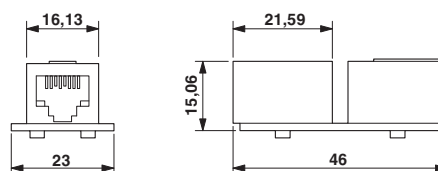


RJ45 socket insert, Freenet system

Schematic diagram




Schematic diagram



Panel mounting frames - VS-PPC-F1-RJ45-MNNA-1C-FJJ - 1405332

Explosion drawing

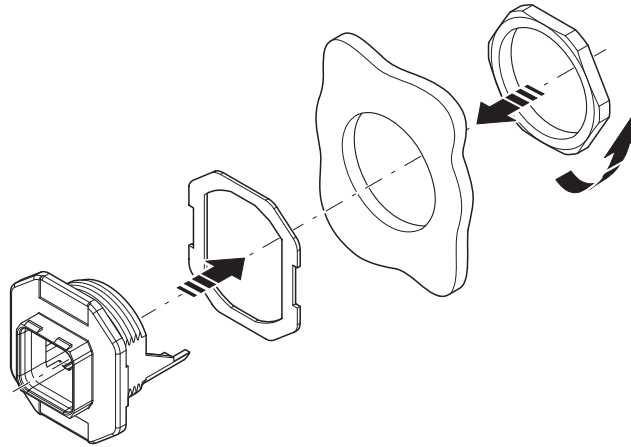

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.00767
-----	--	---------

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>